




■ 型号含义

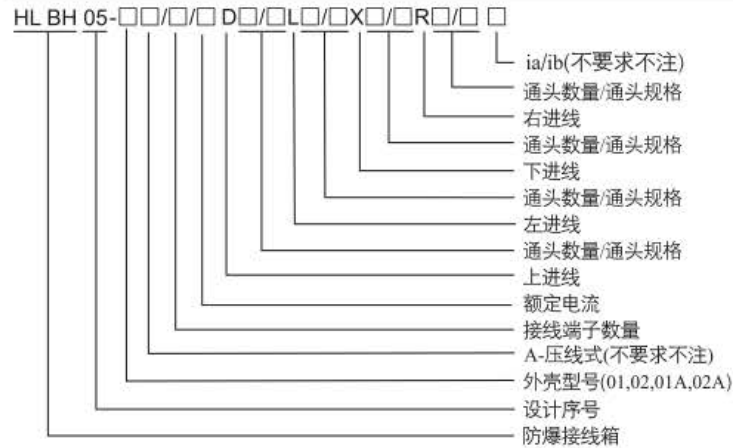

HLBH05-01



HLBH05-02



国际认证产品

■ 适用范围

- 1区、2区ⅡA~ⅡC类爆炸性气体环境，和/或21区、22区爆炸性粉尘场所；
- 环境温度：-40~+45/55/60℃；
- 温度组别：T1~T6；
- 户内、户外(IP66)；
- 用于化工、炼油、石油开采、海洋石油平台、油轮、军工等危险场所。

■ 主要技术参数


型号规格	额定电压(V)	额定电流(A)	端子	端子截面	防爆标志	防腐等级	防护等级
HLBH05-01	AC110,500 DC100,220	10, 12, 20	4×4mm ² +1 PE	4mm ² , PE2.5mm ² (多股线)	Ex eb Ⅱ C T6 Gb Ex tb Ⅲ C T80℃Db	WF2	IP66
HLBH05-02	≤AC/DC36	≤5A	8×4mm ² +1 PE	6mm ² , PE4mm ² (单股线)	Ex ia Ⅱ C T6 Ga Ex ib Ⅱ C T6 Gb Ex tb Ⅲ C T80℃Db		

■ 方案举例


HLBH05-01方案	电缆入口	电缆外径
	2×M20	φ6~φ12mm
	2×M25	φ10~φ14mm
	3×M20	φ6~φ12mm
	3×M25	φ10~φ14mm
	4×M20	φ6~φ12mm
	4×M25	φ10~φ14mm

HLBH05-02方案	电缆入口	电缆外径
	4×M25	φ10~φ14mm
	4×M32	φ13~φ19mm
	6×M25	φ10~φ14mm
	6×M32	φ13~φ19mm
	8×M25	φ10~φ14mm
	8×M32	φ13~φ19mm

■ 外形及安装尺寸



HLBH05-01



HLBH05-02



默认标配



A型