


8051-系列防爆防腐断路器(ⅡC)

■ 型号含义

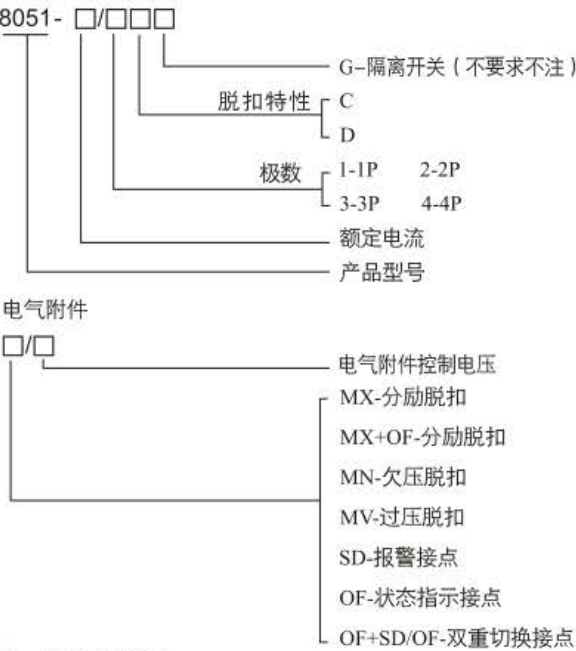

注：电气附件请注明。

■ 产品特点


1. 玻璃纤维增强不饱和聚酯树脂压制外壳，强度高、热稳定性好；
2. 专用操作机构，灵活可靠；
3. 内装施耐德、ABB等系列小型断路器，具有短路、过载保护功能；
4. 内装施耐德、ABB等系列隔离开关，具有隔离电路作用；
5. 外壳设有主端子接点、电气附件接点和操作手柄；
6. 本产品应与增安型壳体配套使用，不可单独使用。

■ 主要技术参数

额定电压(V)	防爆标志	电气附件 接点容量	端子截面(mm²)	
			主接点	电气附件接点
AC220~240 AC380~415	Ex db eb ⅡC Gb	AC-13 3A/250V AC-15 2A/250V	2×10(≤40A) 2×16(≤63A)	2×2.5

内装元件	极数	脱扣特性	额定电流(A)
小型断路器	1P, 2P, 3P, 4P	C/D	1, 2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63
隔离开关	1P, 2P, 3P, 4P	/	16, 20, 25, 32, 40, 50, 63

■ 电气原理图

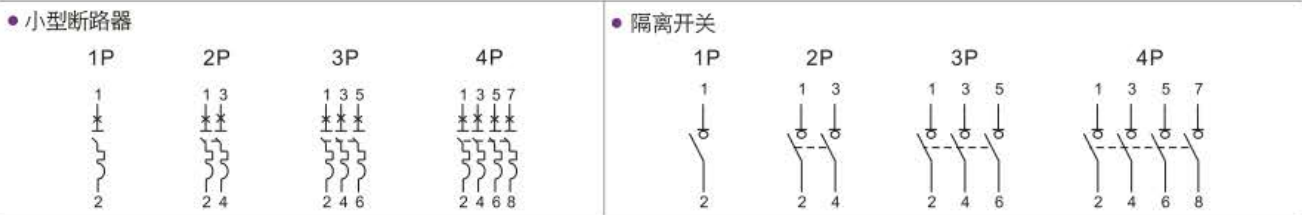


8051-系列防爆防腐断路器(ⅡC)


Ex 元件篇


■ 电气附件


类型	控制电压	
	(V AC)	(V DC)
MX分励脱扣单元	110...415	110...130
	48	48
	12/24	12/24








MX+OF分励脱扣单元	110...415	110...130
	48	48
	12/24	12/24




类型	控制电压		类型
	(V AC)	(V DC)	
MN欠压脱扣单元 瞬时脱扣	220...240	—	SD报警接口 
	48	48	
	220...240	—	
MN[S]延时脱扣 			OF状态指示接口 




MV过压脱扣单元  MV	230	—	14 12 11
			OF+SD/OF双重切换接点  24/92 22/94 21/91




■ 外形及安装尺寸




尺寸 1




尺寸 2



尺寸3



尺寸 4



尺寸 (mm)	极数
尺寸 1	1P
尺寸 2	2P, 1P+电气附件

尺寸 (mm)	极数
尺寸 3	3P, 2P+电气附件
尺寸 4	4P, 3P+电气附件